

No Sound Series

1800 XNS


Certified for:

- Sound insulation
54 dB
- Fire resistance:
60 min.
- Insulation from smoke
1,50 m² / h / m - 25 Pa
- Usage cycles
200.000 cycles

Protects from:

- Air
- Water
- Light
- Insects


Not an obstacle for disabled persons

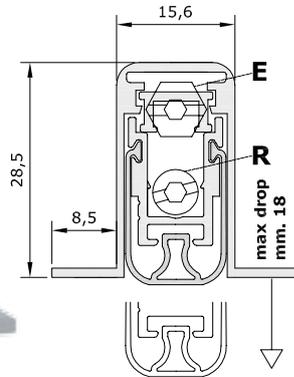

Standard measurements (mm)	430	530	630	730	830	930	1030	1130	1230	1330	Longer lengths on request
Max shortening (mm)	120	100	100	100	100	100	100	100	100	100	


FASTENING SYSTEMS

STANDARD

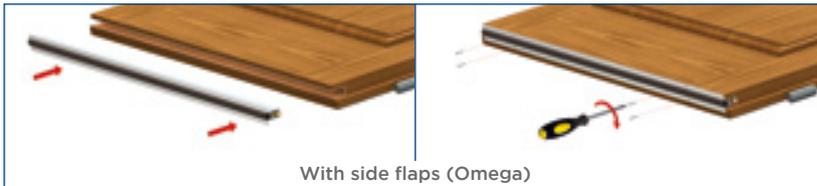

With side flaps (Omega)

MAIN APPLICATIONS

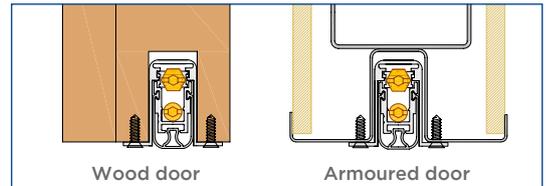

Wood door

Armoured door

• **FEATURES** Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - high performance wrap-around silicone gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel.

• VARIATIONS ON REQUEST

Button: round nylon, square nylon, bevelled nylon.

STANDARD PACKAGING

Cardboard box with 28 pcs + 28 standard accessory packs

OPTIONAL PACKAGING

Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

OPTIONAL ACCESSORIES

Nylon plate

CA101 CA102 CA104



Colour:
brown, white

Packaging:
100 pcs pack


CA101
on smooth frame



CA104
on smooth frame



Intumescent rubber



Insulating nylon plate with silicon gasket

PI001 PI002 PI002-R



Colour:
brown, white

Packaging:
20 pcs pack

PI002
on smooth frame



PI002
on smooth frame

